

pangunahing sukat ng sasakyan
uri ng taksi
bagong disenyo flat patunay, solong hilera cab, air conditioning
pangkalahatang sukat (l x w x h) (mm)
5995 x 2500 x 2500
numero ng ehe
2
type ng drive
4*2
uri ng pagpipiloto
lhd o rhd na may hydraulic power steering
max.
95
curb weight (kg)
tinatayang 3210
parameter ng chassis
modelo ng chassis
ZZ2047G3425E145
tagagawa ng tsasis:
sinotruk
paghahatid
manu-manong, 5 bilis pasulong at 1 baligtad
preno
air preno, huminga ng preno
gulong
7.50R16 na may 1 ekstrang gulong
parameter ng engine
tatak
kunming yunnei
modelo
yn38cre1
uri ng gasolina
diesel
lakas ng kabayo (kW)/(hp)
95 (129hp)
pag-aalis (ml)
3760
pamantayang paglabas
euro 5/4/3
superstructure parameter
materyal sa katawan
mataas na kalidad na istruktura na bakal Q235
sukat ng katawan (l*w*h) (mm)
4150 x 2300 x 500
kapal ng gilid (mm)
4mm na may swastika grid side panel
ilalim na kapal (mm)
6mm
uri ng pag-angat
Middle cylinder lifting
dump na pamamaraan

likuran dump

Larawan tulad ng sa ibaba:








Whatsapp & Telephone: +86 18607222773 Email: brenda@clewtruck.com

Dump truck Detail



1

Cab console

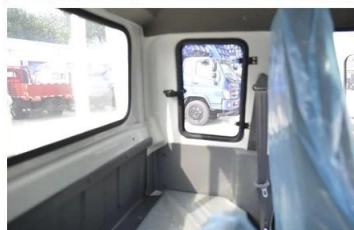

2

Row and a half Double cabin Single row



3

Cargo box

Save unloading time and labor greatly, shorten transportation cycle, improve production efficiency, reduce transportation costs.



4

Lifting system

use double hydraulic jack, the angle of dump is from the angle of scientific safety, high efficiency for works.



5

Rear lamp cover



6

Tyre

Tyres: use carry cargo tyres / use engineering tyres.
Brakes: use air brakes and foot brakes. Suitable for many kinds of roads.

