

Vehicle Main Dimensions	Cab type	new design flat proof, single row cab, air conditioning
	Overall dimension(L×W×H)(mm)	5995×2500×2500
	Axle number	2
	Drive type	4*2
	Steering type	LHD or RHD with hydraulic power steering
	Max. Drive Speed (km/h)	95
	Curb weight (kg)	Approx 3210
Chassis parameter	Chassis Model	ZZ2047G3425E145
	Chassis manufacturer:	Sinotruk
	Transmission	Manual , 5 speed forward and 1 reverse
	Brakes	air brake, breathe brake
	Tire	7.50r16 with 1 Spare tire
Engine parameter	Brand	Kunming Yunnei
	Model	YN38CRE1
	Fuel type	Diesel
	Horse Power(kw)/(hp)	95(129HP)
	Displacement(ml)	3760
	Emission Standard	Euro 5/4/3
Superstructure Parameter	Body material	High quality structural steel Q235
	Body dimension(L*W*H)(mm)	4150×2300×500
	Side thickness(mm)	4mm with swastika grid side panels
	Bottom thickness(mm)	6mm
	Lifting type	middle cylinder lifting
	Dump method	Rear dump

Image as below :








Whatsapp & Telephone: +86 18607222773 Email: brenda@clewtruck.com

Dump truck Detail



1

Cab console

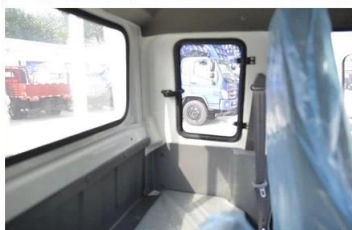

2

Row and a half Double cabin Single row



3

Cargo box

Save unloading time and labor greatly, shorten transportation cycle, improve production efficiency, reduce transportation costs.



4

Lifting system

use double hydraulic jack, the angle of dump is from the angle of scientific safety, high efficiency for works.



5

Rear lamp cover



6

Tyre

Tyres: use carry cargo tyres / use engineering tyres.
Brakes: use air brakes and foot brakes. Suitable for many kinds of roads.

