

1. 材料要求及规格:

1.1 纤维布: 玻璃纤维布/碳纤维布

1.2 树脂: GRP 树脂 PU 树脂 GRP (Glass Reinforced Plastic Fiber) 树脂

1.3 纤维布 PU 树脂

2. 材料规格: 纤维布规格 40%

3. 材料规格: 纤维布规格 50-80 目

4. 材料规格: 纤维布规格 50-80 目

5. 材料规格: 纤维布规格 10-40 目; 纤维布规格 5-70CBM

6. 材料规格: 纤维布规格

7. 材料规格: 纤维布规格

8. 材料规格: 纤维布规格

9. 材料规格: 纤维布规格 Optioanl : American CARRIER, THERMO KING. 纤维布规格.

10. 材料规格: 纤维布规格

hanxue 纤维布规格 0° C ~ -20° C 纤维布规格

纤维布规格, 纤维布规格, 纤维布规格, 纤维布规格,

纤维布规格, 纤维布规格, 纤维布规格, 纤维布规格

纤维布规格

General Technical Parameters				
Overall Dimension	7025*2590*3300(mm)		Gross Vehicle Weight	8280(Kg)
Curb Weight	4085(Kg)		Loading Weight	4000(Kg)
Chassis Specification				
Chassis parameters	Chassis Brand		ISUZU	
	Cabin		Single, Left Hand Driving, with A/C	
	Engine	Model	4KH1CN6HB, 4 Cylinders	
		Power	130HP	
		Emission standard	EURO VI	
		Displacement	2.999L	
		Fuel type	Diesel	
	Gearbox		MSB, 5 Forward & 1 Reverse Gear	
	Front and Rear Axle load		3.3T/5.5T	
	Wheel base		3815(mm)	
	Overhang(Front/Rear)		1130/1505(mm)	
	Angle(Approach/departure)		20/16(°)	
	Brake System		Oil brake	
	Steering Gear		Power Assistant	
	Tire		7.00R16 8PR, 6 Pieces with 1 Spare Tire	
Maximum speed		105(km/h)		
Superstructure				
Van	Box size		5020*2100*2100(mm)	
	Material		Fiberglass	
	Insulating Layer		8cm Polyurethane Foam	
Truck refrigeration unit	Brand		THERMOKING/CARRIER/other <u>chinese</u> brand	
	Applicable temperature (°C)		-18~0	
Remarks	Part Optional: Ventilation slot Hook External power supply			

□□□□□□□□□□□□□□:





Whatsapp & Telephone: +86-18607222773 Email: brenda@clclwtruck.com




Whatsapp & Telephone: +86-18607222773 Email: brenda@clclwtruck.com





Whatsapp & Telephone: +86-18607222773 Email: brenda@clclwtruck.com



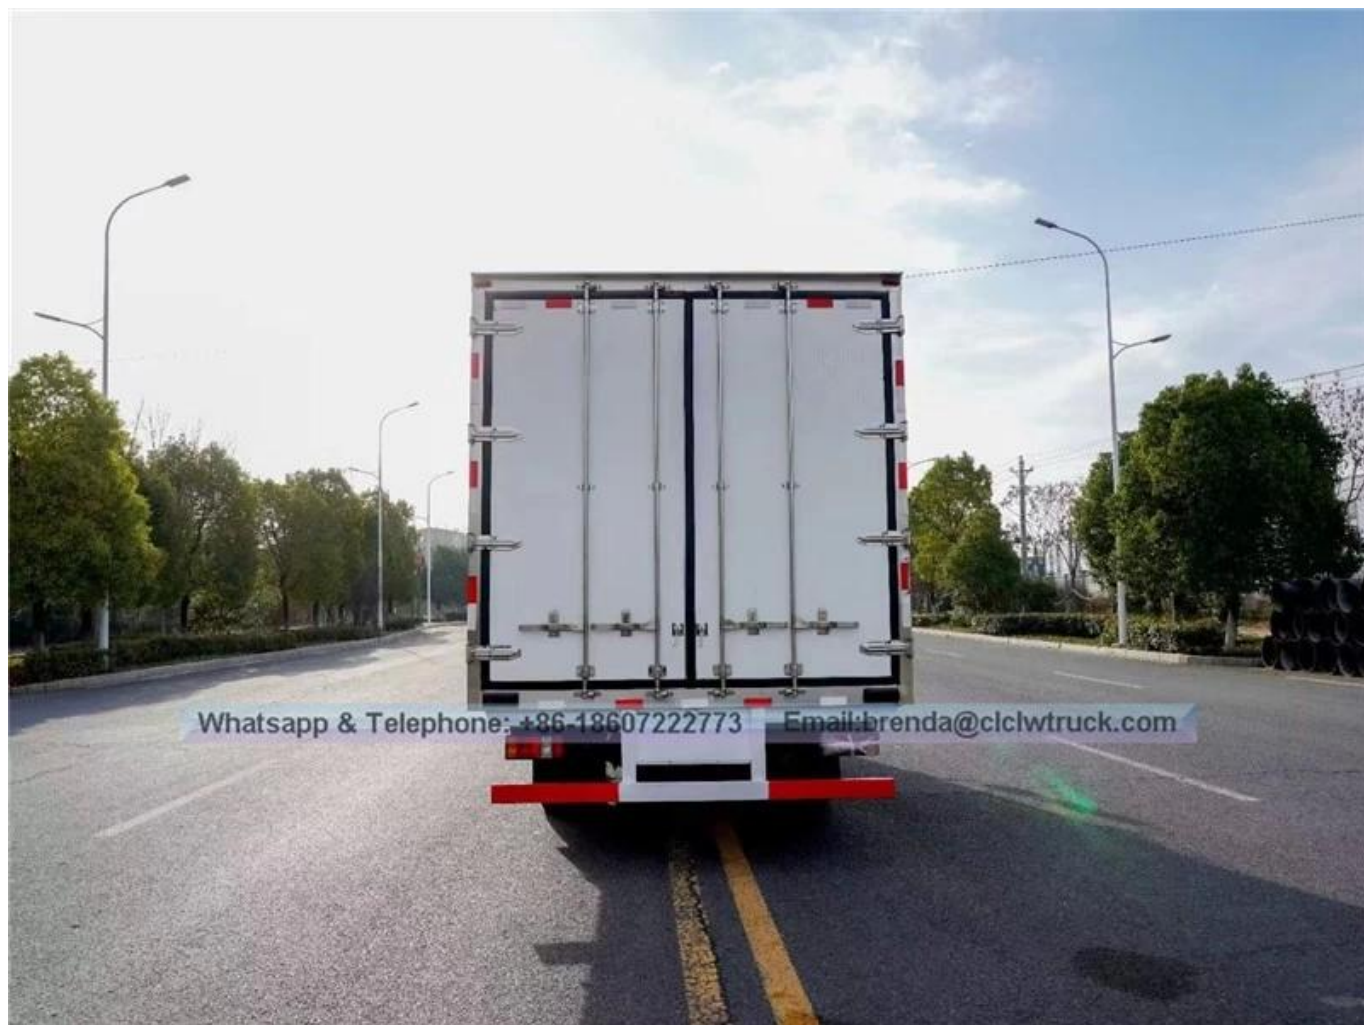

Whatsapp & Telephone: +86-18607222773

Email: brenda@clclwtruck.com



Whatsapp & Telephone: +86-18607222773 Email: brenda@clcwtruck.com

